

# FlangeBand® TileBud™

Install FlangeBand TileBud over the rim of a shower base or bathtub with no tile flange.



## Installation Accessories

## Sealing Components




Sealux-N Silicone



4" (100mm) Sealux Strip



Alcohol Wipes





Alignment Card



Utility Spatula




Adhesive Spreading Spatula

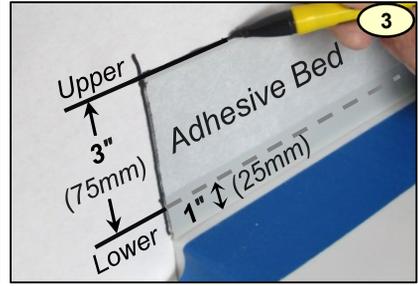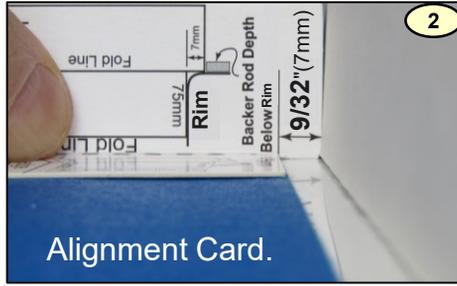

**1.** Clean the rim with alcohol wipes. **2.** Apply painters tape over the rim 9/32" (7mm) out from walls. **3.** Twice apply 2 wall marks to each wall at 3" (75mm) and 1" (25mm) above the rim.



If using silicone sealant as a strip adhesive, apply painters tape on wall above wall lines.

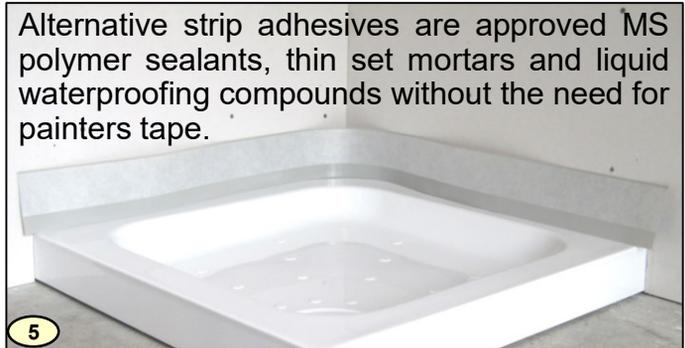

**4.** Draw wall lines through wall marks. These two lines define the adhesive bed upper and lower boundaries. **5.** Measure and cut the strip to extend between the receptor end lines.



**6-8.** Apply a zigzag line of an approved adhesive sealant between the wall lines and spread using the serrated edge of the spatula to form an adhesive bed. With the strip resting on the rim, progressively touch-engage the strip with the adhesive bed. Use the spatula straight edge to firstly press the strip into corners and then firmly against each wall to form a permanent bond. Remove the painters tape off the wall if applied.



**9-10.** Apply Sealux-N (or equivalent) over the first side strip/rim junction and rub up the silicone to form a 9/32" (7mm) fillet over the joint. Repeat this joint sealing process on each remaining side.